


Knifefuse Fuses

DIN Knifefuse Fuses

Rated voltage 500Vac, 440Vdc
 Rated breaking capacity 120kA @ 500Vac,
 25kA @ 440Vdc

Size 0

Amperage	Ref No	Box Qty.
63A	0GL63	3
80A	0GL80	3
100A	0GL100	3
125A	0GL125	3
160A	0GL160	3

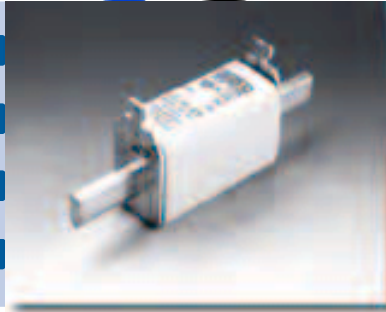

Characteristic gL/gG (General Line)

Body Length 65mm
 Body Width 29mm
 Overall Length 125mm

Other amperages (2A, 4A, 6A, 10A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 200A) and 690Vac rated versions available on request

Characteristic gR (ultra rapid) on request


Please note: often size 1 fuse can meet same requirement.

DIN Knifefuse Fuses

Rated voltage 500Vac, 440Vdc
 Rated breaking capacity 120kA @ 500Vac,
 25kA @ 440Vdc

Size 1

Amperage	Ref No	Box Qty.
100A	1GL100	3
125A	1GL125	3
160A	1GL160	3
200A*	1GL200	3
250A*	1GL250	3

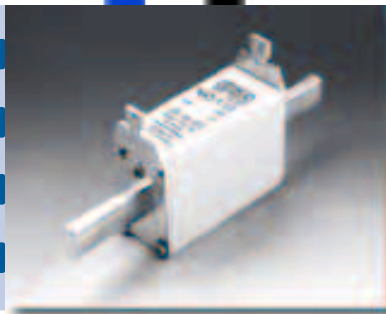

Characteristic gL/gG (General Line)

Body Length 65mm
 Body Width 42mm (* 48mm)
 Overall Length 135mm

Other amperages (16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A, 80A) available on request

Size 1

Amperage	Ref No	Box Qty.
160A	1GR160	3
200A*	1GR200	3
250A*	1GR250	3



Characteristic gR (Ultra Rapid)

Body Length 65mm
 Body Width 42mm (* 48mm)
 Overall Length 135mm

Other amperages (16A, 20A, 25A, 32A, 40A, 50A, 63A, 80A, 100A, 125A) available on request

Many other versions of ultra rapid fuses with different fixings, voltage ratings are available on request